

NEW GENERATION


QG-SERIES



M&L

PARTS BREAKDOWN ILLUSTRATION

Simply Better
&
Accurate

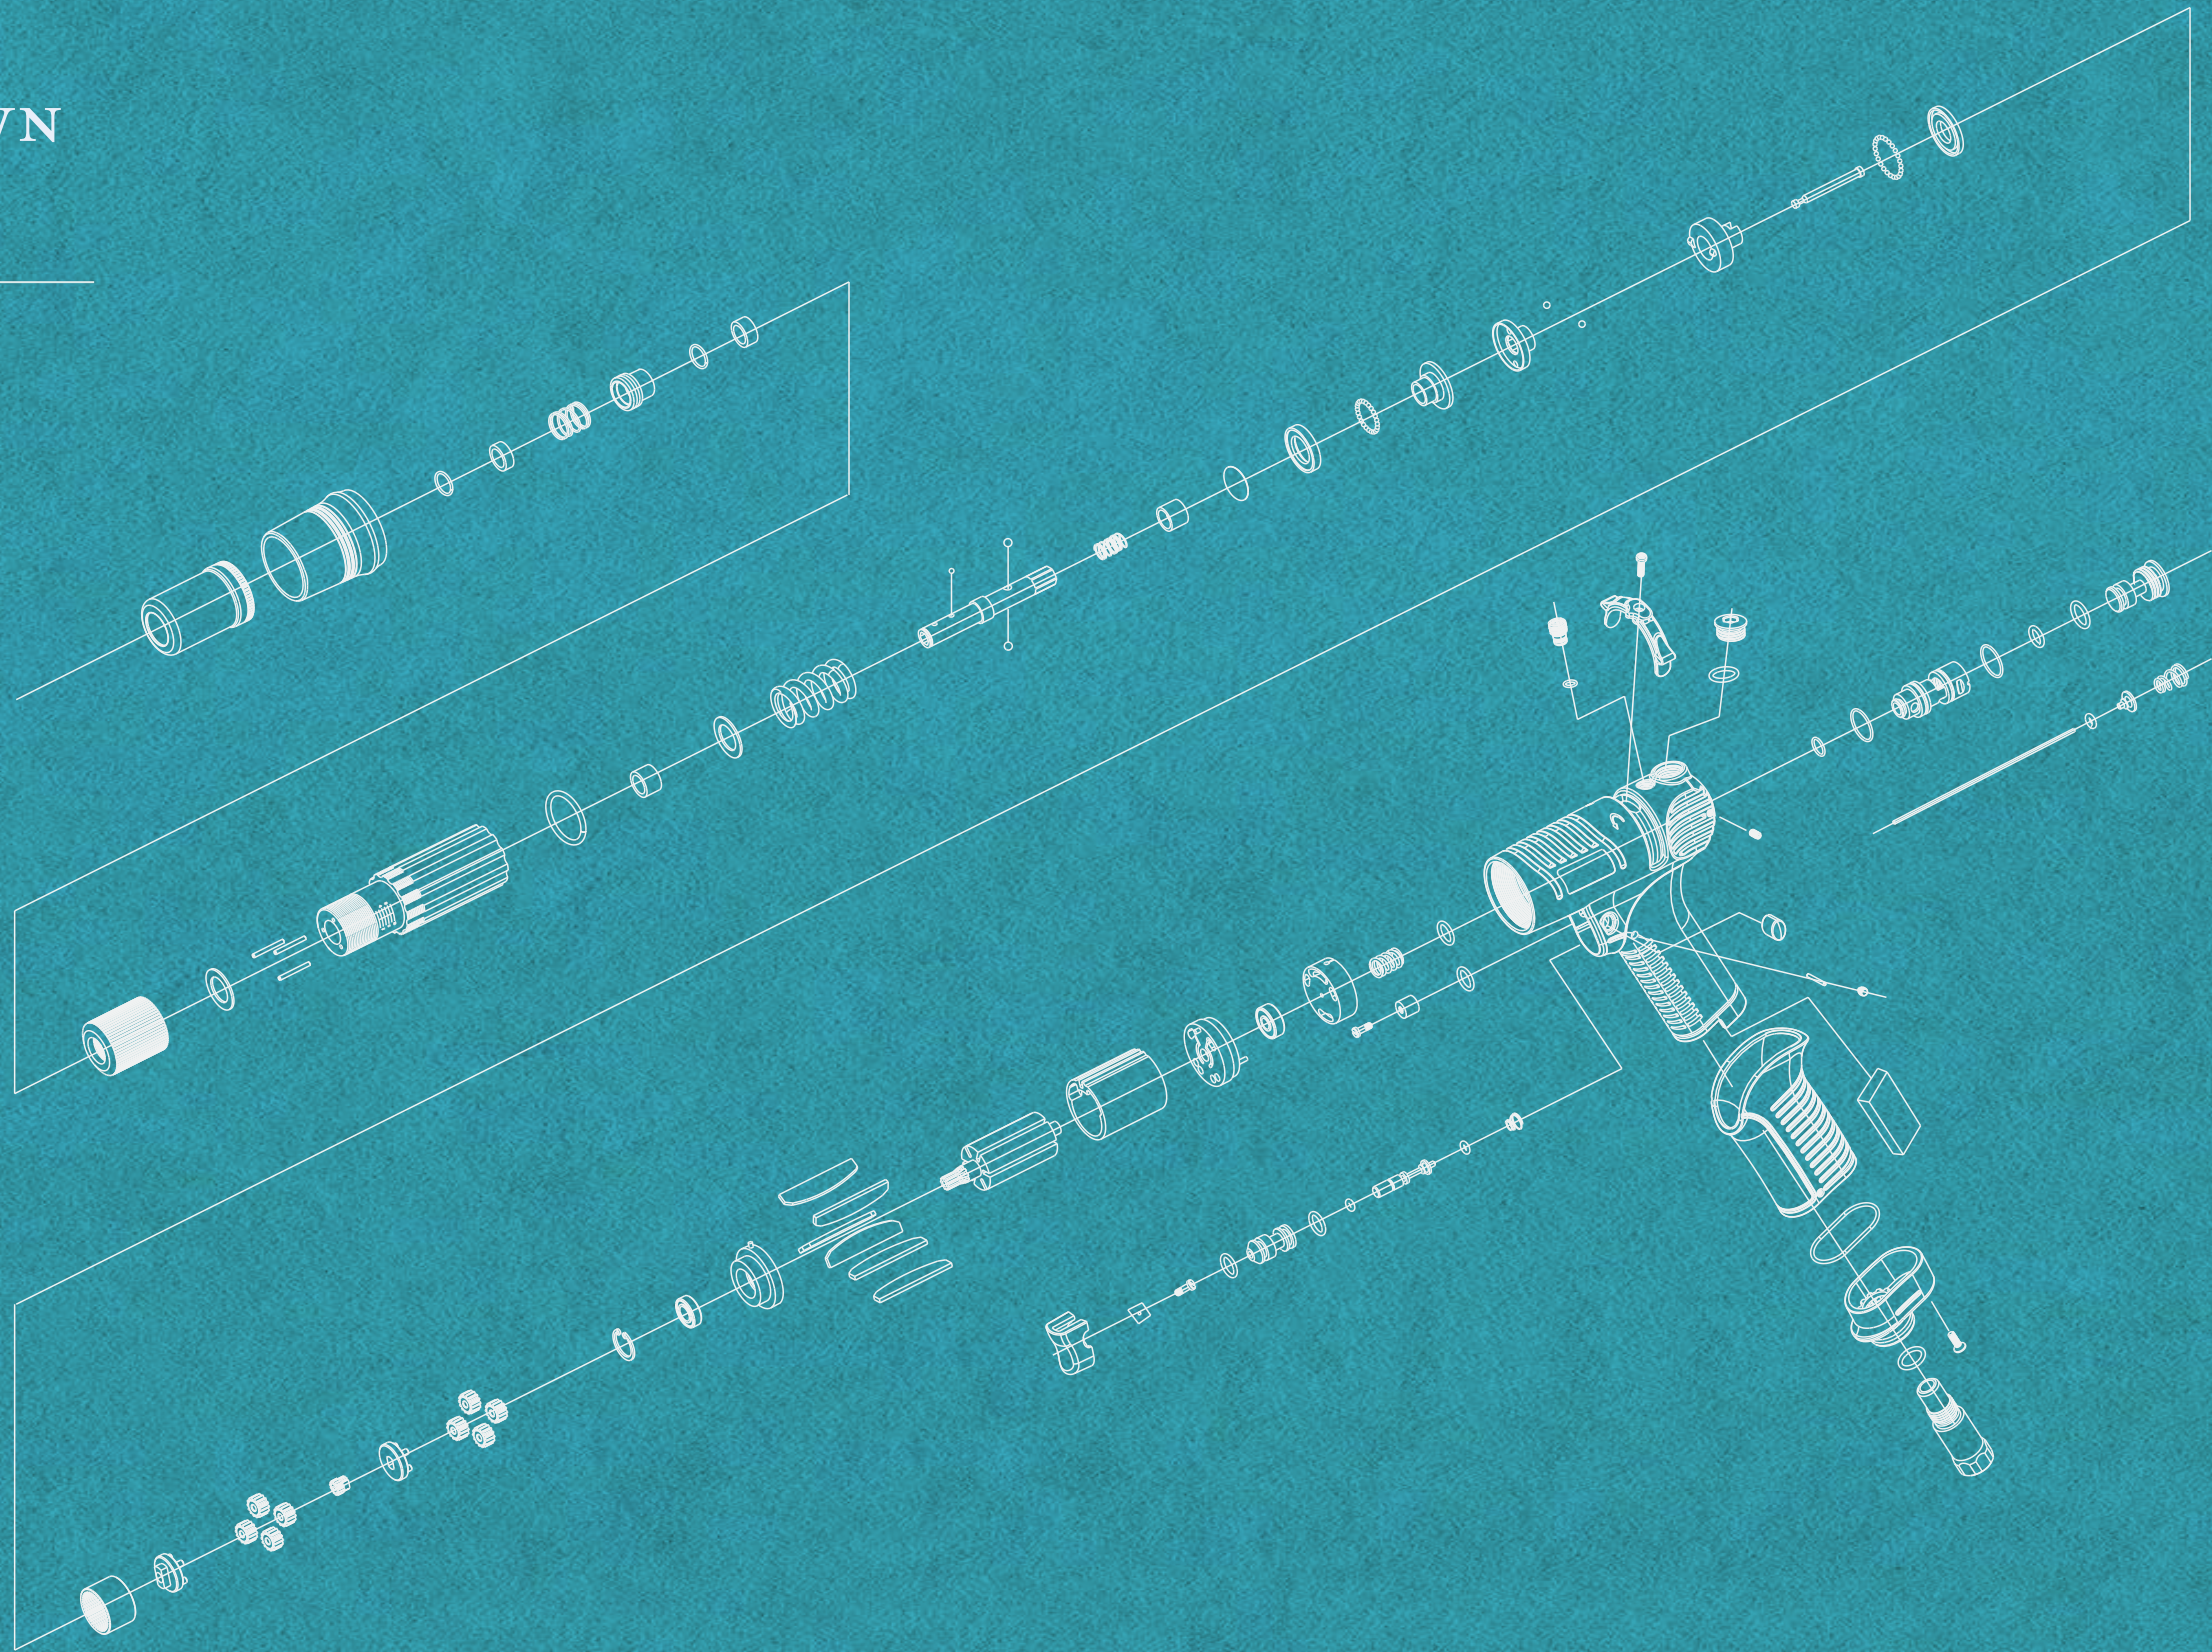


AUTO SHUT OFF CLUTCH PNEUMATIC SCREWDRIVERS PISTOL GRIP

Super Industrial Use.
Specifications are subject to change without to prior notice

MODEL	TORQUE RANGE	SPEED	MIN AIR HOSE ID	AIR PRESSURE	AIR COMSUMPTION	NOISE	REPEATABILITY	WEIGHT
Trigger Start	Kgf-cm	r.p.m	mm	Kg/cm ²	L/S	±2dBA	%	Kg
QG35BBP	3.0-20	2200	5	6	6	74	±3	0. 69
QG38BBP	3.0-25	1800	5	6	6	74	±3	0. 69
QG41BBP	5.0-35	1000	5	6	6	74	±3	0. 69
QG47BBP	10-50	550	5	6	6	74	±3	1. 03
QG48BBP	7.0-50	1700	8	6	10	78	±3	1. 03
QG481BBP	10-60	2200	8	6	10	78	±3	1. 03
QG50BBP	10-60	1400	8	6	10	78	±3	1. 03
QG55BBP	12-75	1000	8	6	10	78	±3	1. 03
QG60BBP	30-110	550	8	6	10	78	±3	1. 03
QG65BBP	30-180	300	8	6	10	78	±3	1. 25
QG68BBP	50-280	250	8	6	10	78	±3	1. 25

★【Custom-made】Customized models available upon request. Please contact us for further information.

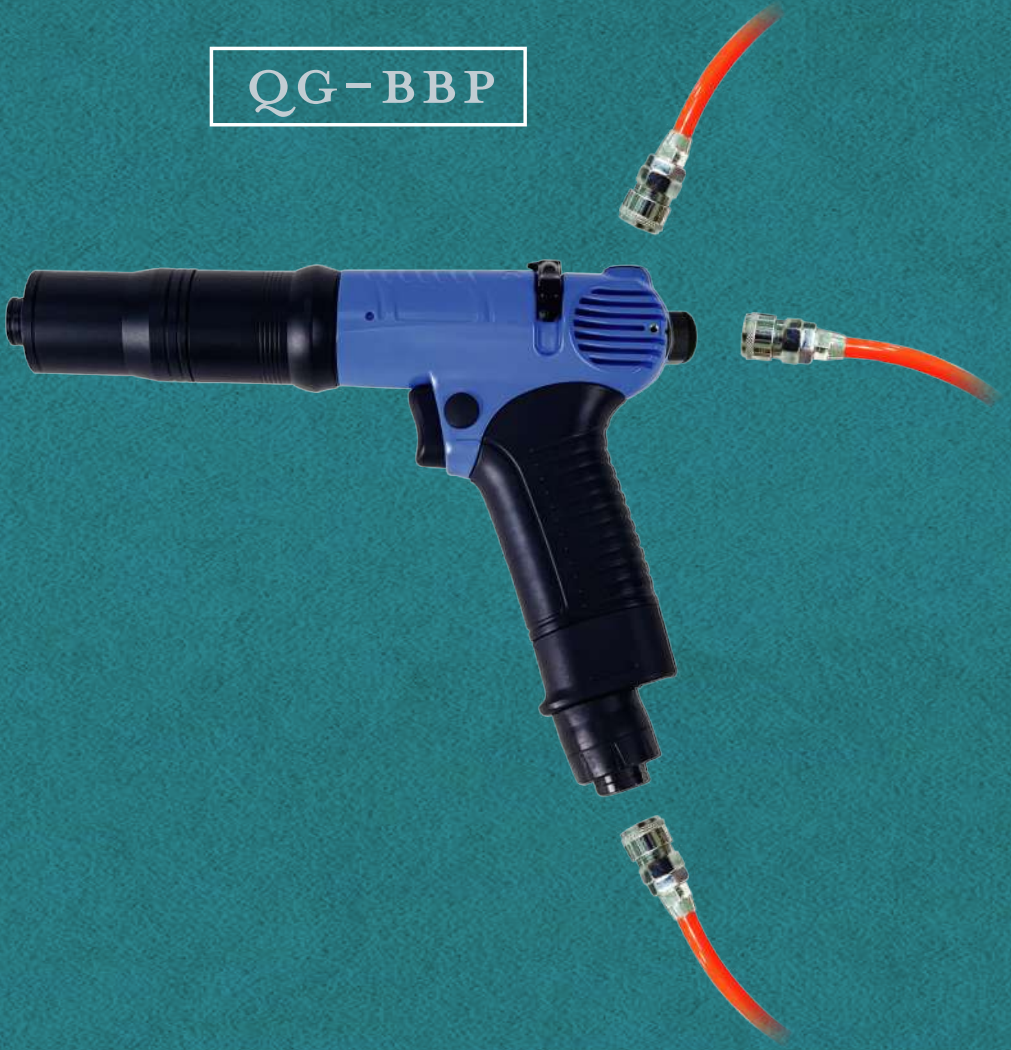

MORE FEATURES OF QG SERIES

1. With 3 Air Inlets, it can be used in vertical and horizontal applications
2. Excellent Accuracy for various applications and easy torque adjustment
3. Oil free for better performance & durability
4. Machine capability index > 2.2 @ ±10% (According to ISO5393)
5. Machine capability testing according to VDI2647
6. Drive Available:  1/4”Hex 、  1/4”SQ 、  3/8”SQ